

GPU Accelerated Multiple Deoxyribose Nucleic Acid Sequence Parallel Matching

Gang Liao

Computer Science & Engineering

Sichuan University Jinjiang College, Pengshan, China, 620860

Email: greenhat1016@gmail.com

Longfei Ma

Computer Science & Engineering

Sichuan University Jinjiang College, Pengshan, China, 620860

Email: fly3601@gmail.com

Qi Sun

Computer Science & Engineering

Sichuan University Jinjiang College, Pengshan, China, 620860

Email: SunQi3737@gmail.com

Zhihui Qin

Computer Science & Engineering

Sichuan University Jinjiang College, Pengshan, China, 620860

Email: zhihuiqindoris@gmail.com

Abstract—In this paper, a contrastive evaluation of massive parallel implementations of suffix tree and suffix array to accelerate genome sequence matching are proposed based on Intel Core i7 3770K quad-core and NVIDIA GeForce GTX680 GPU(kepler architecture). Due to the more regular execution flow of the indexed binary search algorithm, the more efficient use of the cache memory and the space occupied by the suffix array index is much smaller than that of the suffix tree index, the suffix array clearly outperform the suffix tree using GPU. The suffix array is more than 99 times than that of CPU serial implementation. Simultaneously, the space occupation approximately 20%~30% relative to that of suffix tree. The experimental results show that the parallel matching algorithm with respect to suffix array is an efficient approach to high performance bioinformatics applications.

Keywords—suffix array, suffix tree, GPU, binary search, bioinformatics

I. INTRODUCTION

In recent years, modern multi-core and many-core architectures are revolutionizing high-performance computing (HPC). As more and more processor cores are being incorporated into a single chip, the era of the many-core processor has begun. The emergence of many-core architectures, such as compute unified device architecture(CUDA)-enabled GPUs [12], and other accelerator technologies (e.g. field-programmable gate arrays (FPGAs) and the Cell/BE), which provide the opportunity to significantly reduce the runtime of many biological algorithms on commonly available and inexpensive hardware with more powerful high-performance computing power. Since the introduction of Compute Unified Device Architecture (CUDA) in 2007, more than 100 million computers with CUDA capable Graphics Processing Units (GPU) have been shipped to end users. In the golden age of the GPU computing, with such a low barrier of entry, researchers all over the world have been engaged in developing new algorithms and applications to utilize the extreme floating point execution throughput of these GPUs.

Life science have emerged as a primary application area for the use of GPU computing. High-throughput techniques for DNA sequencing and gene expression analysis have led

to a data explosion. Prominent examples are the growth of DNA sequence information in NCBI's GenBank database and the growth of protein sequences in the UniProtKB/TrEMBL database. Furthermore, emerging next-generation sequencing technologies [16] have broken many experimental barriers to genome scale sequencing. Due to GPU performance grows faster than CPU performance, therefore, the use of GPUs in bioinformatics is a perfect match.

Suffix tree of a string is the compact trie of all its suffixes, it's widely used in bioinformatics applications[6], e.g., MUMmer [10] and MUMmerGPU [15]. It's can be constructed in linear time by the length of the string [3][18][11]. Nevertheless, with the growth of the reference sequence, suffix tree also stuck in bottleneck because of Dynamic Random Access Memory(DRAM) consumption. Due to the efficient usage of the cache memory and the space occupied by suffix array only approximately 20% ~ 30% relative to that of suffix tree, suffix array are sometimes preferred to suffix tree. That is, genome sequence search can be efficiently solved with suffix array. Simultaneously in CPU only take $O(n)$ time to implement suffix array [8][13]. In this paper, we use the GPU implementations(suffix tree and suffix array) to accelerate genome sequence matching on two different platforms: multi-core(CPU's) and many-core(GPU). The GPU implementations show a tremendous performance, the suffix array is more than 99 times than that of CPU serial implementation and the suffix trees speedup is approximately to 44-fold.

II. MASSIVELY PARALLEL PROCESSORS

Since 2003, the semiconductor industry has settled on two main trajectories for designing microprocessor [7]. The many-core trajectory focuses more on the execution throughput of parallel applications, in contrast with the multicore trajectory(i.e. maintain the execution speed of sequential programs while moving into multiple cores). The many-cores began as a large number of much smaller cores, and, once again, the number of cores doubles with each generation. A typical exemplar is NVIDIA® GPU, each core is a in-order, heavily multi-threaded, single-instruction issue processor that shares its control and instruction cache with other cores. Due to the

The diagram illustrates the architectural differences between a CPU and a GPU. On the left, the CPU architecture is shown with a central CPU block containing four ALUs and a Cache, connected to a DRAM block. On the right, the GPU architecture is shown with a large GPU block composed of many small units, connected to a DRAM block.

The original design philosophy of the GPUs is shaped by the fast growing video game industry, which exerts tremendous economic pressure for the ability to perform a massive number of floating-point calculations per video frame in advanced games. The hardware takes advantage of a large number of execution threads to find work to do when some of them are waiting for long-latency memory accesses, thus minimizing the control logic required for each execution thread. Small cache memories are provided to help control the bandwidth requirements of these applications so multiple threads that access the same memory data do not need to all go to the DRAM. As a result, much more chip area is dedicated to the floating-point calculations.

In modern software applications, program sections often exhibit a rich amount of data parallelism, a property allowing many arithmetic operations to be safely performed on program data structures in a simultaneous manner. The CUDA devices accelerate the execution of these applications by harvesting a large amount of data parallelism. Here, we just presented a short, informal discussion of GPU architecture and CUDA fundamentals [15][14][9]. In recent years, a significant amount of new and interesting technologies have sprung up to efficiently solve problem in scientific research and commercial applications. There are several programming languages suitable for GPU programming, except for CUDA, the most common being OpenCL [4], OpenACC, and C++ AMP [5].

Given a reference sequence $S = s_1s_2...s_n$. For $i = 1, 2, ..., n$, every $S(i, n)$ is a suffix of S . Initially, for the four nucleic acid bases include adenine, guanine, thymine, and cytosine that makes up Deoxyribonucleic acid(DNA), define $\Sigma = \{a, c, g, t\}$. We shall label the suffixes according to the location of the starting character, that is, $S_i = S(i, n)$. For example, if $S = acggtacgtac$, $S_2 = cggtacgtac$ and $S_8 = gtac$, just like the left-hand side of Figure 3. A suffix tree of S of length n is a tree with the following properties: 1) Each tree edge is labeled by a subsequence of S . 2) Each internal node has at least two children. 3) For $1 \leq i \leq n$, each S_i has its corresponding labeled path from root to a leaf. 4) No edges branching out from the same internal node can start with the same character. The typical suffix tree is illustrated as Figure 2.

Still, when compared to suffix trees, the suffix arrays are regarded as a more space-efficient implementation. This structure can be served as an array of integers representing the start position of every lexicographically ordered suffix of a string, which is illustrated by Figure 3. For suffix array in table I, defined as SA .

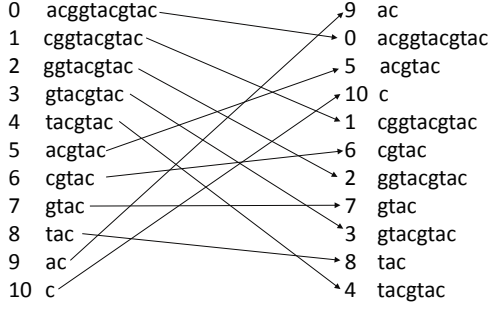


Fig. 3. For a reference sequence $S = acggtacgtac$, all the suffixes are added into the array and sorted lexicographically so as to binary search.

TABLE I. THE SORTED SUFFIX INDEX TABLE FOR $S = acggtacgtac$

Index	0	1	2	3	4	5	6	7	8	9	10
SA	10	1	6	11	2	7	3	8	4	9	5

The most straightforward way to construct the suffix array is to simply create an array with all the suffix elements placed in ascending order and then apply a sorting algorithm to properly sort the suffixes. We can utilize Difference Cover Modulo 3(DC3) algorithm to implementation in $O(n)$ time.

A linear time suffix array construction algorithm, namely DC3. It takes the following 2/3-recursive divide-and-conquer approach:

1. Construct the suffix array of the suffixes starting at position $i \bmod 3 \neq 0$.

For $k = 0, 1, 2$, define $B_k = \{i \in [0, n] \mid i \bmod 3 = k\}$. Let $C = B_1 \cup B_2$ be the set of sample positions and S_C the set of sample suffixes. For a reference sequence $S = acggtacgtac$, $B_1 = \{1, 4, 7, 10\}$, $B_2 = \{2, 5, 8\}$ and $C = \{1, 4, 7, 10, 2, 5, 8\}$. For $k = 1, 2$, construct the strings $R_1 = [cgg] [tac] [gta] [c00]$, $R_2 = [ggt] [acg] [tac]$ and $R = R_1 \odot R_2 = [cgg] [tac] [gta] [c00] [ggt] [acg] [tac]$. Radix sort[1] the characters are of R and rename them with ranks to obtain $rank(S_i)$.

TABLE II. FOR $S = acggtacgtac$, THE RANKS OF THE SORTED SAMPLE SUFFIXES

i	0	1	2	3	4	5	6	7	8	9	10
$rank(S_i)$	$\perp$	3	5	$\perp$	6	1	$\perp$	4	7	$\perp$	2

2. Construct the suffix array of the remaining suffixes using the result of the first step.

Represent each non-sample suffix $S_i \in S_{B_0}$ with the pair $(S_i, rank(S_{i+1}))$. For all $i, j \in B_0$, $S_i \leq S_j \Leftrightarrow (S_i, rank(S_{i+1})) \leq (S_j, rank(S_{j+1}))$. The pairs are then radix sorted. For $S = acggtacgtac$, $B_0 = \{0, 3, 6, 9\}$. Because of $(a, 2) \leq (a, 3) \leq (c, 5) \leq (g, 7)$, $S_0 \leq S_9 \leq S_6 \leq S_3$.

3. Merge the two suffix arrays into one using a standard comparison-based merging. To compare suffix $S_i \in S_C$ with $S_j \in S_{B_0}$, There are two cases

- 1) $i \in B_1, S_i \leq S_j \Leftrightarrow (t_i, rank(S_{i+1})) \leq (t_j, rank(S_{j+1}))$
- 2) $i \in B_2, S_i \leq S_j \Leftrightarrow (t_i, t_{i+1}, rank(S_{i+2})) \leq (t_j, t_{j+1}, rank(S_{j+2}))$

Consequently, the time complexity of algorithm DC3 is $O(n)$. Several parallel and hierarchical memory models of computations are presented in [8][17].

IV. INDEXED PARALLEL SEARCH

After the suffixes are sorted, the indexed structure is used for searching query sequence P . For a reference sequence $S = acggtacgtac$, from the table I and Figure 3, which show that the first suffix S_1 is denoted as ac , $S_5 = cggtacgtac$ and $S_7 = ggtacgtac$. If $P = c$, we would find them in locations 4 to 6 in the sorted suffix index table. Similarly, $P = a$ appears at three locations, namely 10, 1, 6 in reference sequence S . This just goes to illustrate that for every query sequence P which appears in S , there is a range which it appears in the sorted suffix index table. The range is defined by its left boundary, denoted as LB , and its right boundary, denoted as RB . For $P = a$, $LB = 1$ and $RB = 3$. For $P = c$, $LB = 4$ and $RB = 6$. For $P = ggtac$, $LB = RB = 7$. Therefore, our job is to search for LB and RB .

Given a query sequence P , in usual, binary search algorithm is an ideal strategy. During the binary search, we compare P with a suffix S_i in the suffix array. There are two possibilities: 1) P is a prefix of S_i and 2) P is not a prefix of S_i .

1. If P is a prefix of S_i , LB may be i or to the left of i and RB may only be i or the right of i . Thus search both left and right of S_i is necessary.
2. If P is not a prefix of S_i and $P < S_i$, both LB and RB must be to the left of S_i if P occurs in S .
3. If P is not a prefix of S_i and $P > S_i$, both LB and RB must be to the right of S_i if P occurs in S .

If P is a prefix of S_i and P is not a prefix of S_{i-1} , then $LB = i$. Similarly, $RB = i$ if P is a prefix of S_i and P is not a prefix of S_{i+1} . If $S = acggtacgtac$, for $P = c$, $LB = 4$ and $RB = 6$. Assume that $P = tac$, $LB = 10$ and $RB = 11$. Both LB and RB can be obtained by binary search.

On the basis of CUDA, the algorithm is modified for multiple query sequences matching concurrently, the pseudocode is depicted in Alg.1. In the kernel function `cudaGeneBinSearch`, `thd` is a private register with respect to a thread respectively, which denote as thread index. All query sequences are organized to a string array `QuerySeq` so that the exclusive thread can be mapped into `QuerySeq[thd]`. The reference sequence is constructed as suffix array so as to the indexed structure enable all threads to string matching simultaneously by means of binary search algorithm supported by GPU. The boundary of the reference sequence can be determined by variables, that is, `left` and `right`. Assume that the length of the reference sequence is n and the length of the query sequence is m , the algorithm take $O(m \log n)$ time to determine LB (the left boundary of the query sequence) or RB (the right boundary of query sequence). (LB, RB) is the matching results with respect to `QuerySeq[thd]`. If (LB, RB) is `NULL`, there is no suffix similar to query sequence. From alg.1, when `pivot` is determined by $(L + R) \gg 1$, we extract a part of sequence segments from global memory to shared memory until `middleSuffixLength` ≤ 0 or `querySequenceLength` ≤ 0 , i.e., $S[SA[pivot]] \rightarrow midSuffix$ and

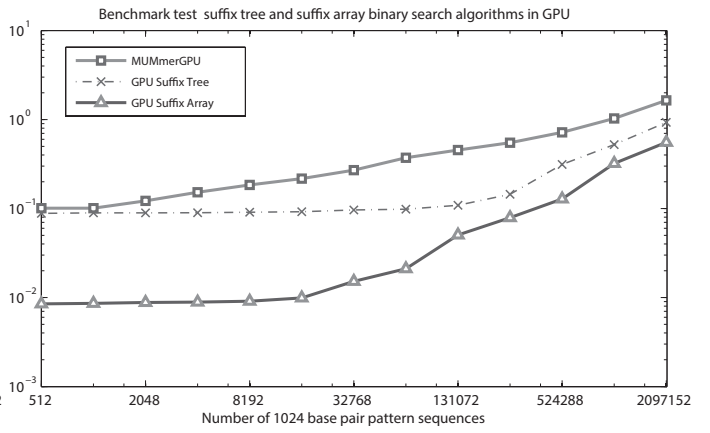
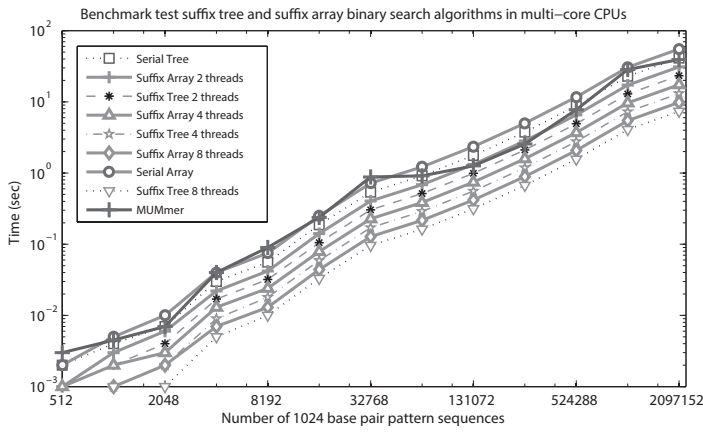


Fig. 4. Benchmark test of suffix tree and suffix array indexed based search algorithms in multi-core CPUs and GPU.

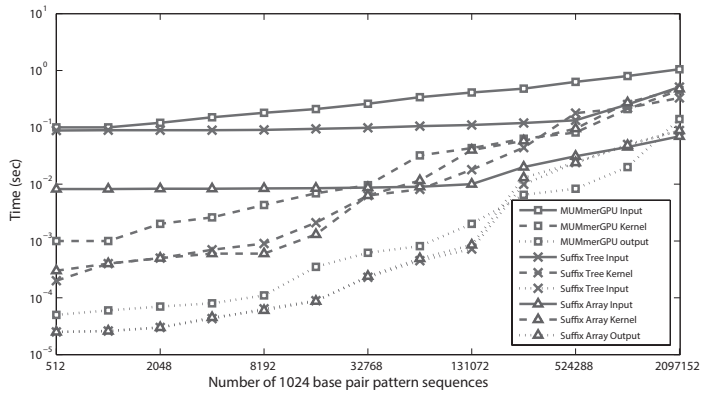


Fig. 5. kernel execution and Communication time for the algorithms in the NVIDIA GeForce GTX 680 GPU.

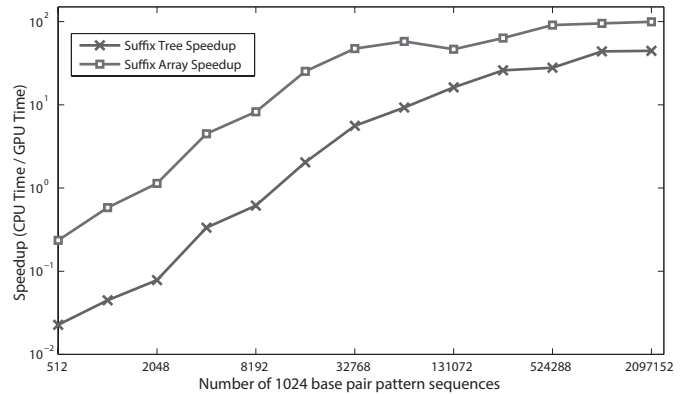


Fig. 6. The speedup ratio of the algorithms between CPU and GPU.

QuerySeq[*thd*] $\rightarrow$ querySequence. Global memory is large but slow, whereas the shared memory is small but fast. A common strategy is to partition the data into subsets called tiles such that each tile fits into the shared memory. It is an effective strategy for achieving high performance in virtually all types of parallel computing systems. In 43rd pseudocode line, `__syncthreads()` function be viewed as a command to be waiting all threads execution in a block, namely synchronization. Only when all threads execute over here, the result of the boundaries (*LB, RB*) with respect to QuerySeq[*thd*] can be assigned and transferred to host.

V. RESULTS

The indexed based search algorithms were evaluated in a computer composed of an Intel Core i7 3770K quad-core processor, running at 3.5GHz, with 1600MHz and 16GB of DRAM. It's worth mentioning that the graphics card is NVIDIA GeForce GTX 680, which is Kepler GPU architecture, with 1536 stream processors running at 6008MHz and 2GB of RAM.

We extracted DNA sequence from NCBI Nucleotide to evaluate the performance of the previously described algorithms. The reference sequence, which was used to build

the indexed structure(suffix tree and suffix array), corresponds to the first 10^7 nucleotides of the NT_167186.1 Homo sapiens chromosome 1 genomic contig. Multiple query sequences(considered set) are 1024 nucleotides long, which derive from a mix of the DNA sequences extracted from the NT_167186.1 Homo sapiens chromosome 1 genomic contig and the NT_039173.8 Mus musculus strain C57BL6J chromosome 1 genomic contig. Several sets of query sequences were used in the experimental test, each one consists of a different number of elements, ranging from 512 to 2097152 query sequences.

In the preliminary estimation, for evaluating the best performance, the parallel implementations of genome sequence search algorithms based either on the suffix tree or on the suffix array index. In a homogeneous multi-core CPU, the algorithms were executed using OpenMP to support the parallel execution of 2, 4 and 8 concurrent threads. Simultaneously it also provided a comparative evaluation with highly efficient CPU based software named MUMmer[10].

The results is illustrated in the left side of Figure 4. Although suffix tree take $O(\log m)$ time to search and suffix array take $O(m \log n)$ time to search, due to a more efficient usage of the cache memory by the suffix array, the asymptotic runtime correspond to the suffix array is slightly greater than

Algorithm 1 Kernel function *cudaGeneBinSearch*: GPU threads parallel matching multiple genome sequence using binary search algorithm

```

1 //geneSubsequence[thd] is one of genome subsequences
2 thd = threadIdx.x+blockDim.x*blockIdx.x;
3 //assign the boundaries to registers
4 L = left, R = right
5 __shared__ midSuffix[segLength], querySequence[segLength]
6 //an  $O(m \log n)$  search algorithm to determine LB
7 while(R > L + 1)
8 {
9     pivot = (L + R) >> 1
10    do {
11        adjust middleSuffixLength and querySequenceLength
12        //update and extract trailing pair bases
13        //send extracted segment to shared memory
14        midSuffix = extract segment from S[SA[pivot]]
15        querySequence = extract segment from QuerySeq[thd]
16        if(midSuffix != querySequence) break
17    }while(middleSuffixLength > 0 && querySequenceLength
> 0)
18    if(midSuffix ≤ querySequence)
19        then R = pivot
20    else
21        then L = pivot
22 }
23 LB = R
24 L = left, R = right
25 //an  $O(m \log n)$  search algorithm to determine RB which
similar to LB
26 while(R > L + 1)
27 {
28     pivot = (L + R) >> 1
29     do {
30         adjust middleSuffixLength and querySequenceLength
31         //update and extract trailing pair bases
32         //send extracted segment to shared memory
33         midSuffix = extract segment from S[SA[pivot]]
34         querySequence = extract segment from QuerySeq[thd]
35         if(midSuffix != querySequence) break
36     }while(middleSuffixLength > 0 && querySequenceLength
> 0)
37     if(midSuffix < querySequence)
38         then R = pivot
39     else
40         then L = pivot
41 }
42 RB = L
43 __syncthreads()
44 res[thd << 1] = LB
45 res[thd << 1 + 1] = RB

```

that of the suffix tree. It also observed that the parallel implemented suffix tree and suffix array are significantly faster than MUMmer.

Furthermore, the performance of the parallel algorithms was evaluated by NVIDIA GeForce GTX 680. The obtained results are depicted in the right side of Figure 4. These results correspond to the total runtime of the search algorithms, which considered communication time (transfer data between host and device) and kernel execution time. The performance of the separated components were portrayed in Figure 5. Just like MUMmer based on CPU, there is a genome sequence alignment tool based on GPU architecture, namely MUMmerGPU[15].

It's worth noting that this figure not contain a comparison with CUDASW+, because of maximum reference size of about 64×10^3 base pairs is the hugely limit factor. Since the indexed structure must be transferred from the CPU host memory to the GPU device memory, the input time is critical to all index-based search algorithms. Indeed, when the number of query sequences to be searched is very small, the data input time occupy the vast majority of total time. Nevertheless, for a larger number of query sequences, the throughput of the highly parallel implementations by GPU amortized the input time. The GPU implementations show a tremendous performance, when the number of query sequences is about 2097152, the suffix array is more than 99 times than that of CPU serial implementation and the suffix tree's speedup is approximately to 44-fold. The more details are observed in Figure 6.

Unlike what happened in CPU implementations, due to the achieved performance in accordance with memory accesses, the experimental results show that GPU implementations clearly favor suffix array. The reason for this situation is not only the more regular execution flow of this algorithm and its more efficient use of the cache memory, but is also the space occupied by the suffix array index is much smaller than that of the suffix tree index, which makes the suffix array implementation to always present a much lower transfer time from the host to the GPU device. From the obtained results it can be observed that the runtime of MUMmerGPU were consistently higher than the implemented suffix tree and suffix array, that is, the indexed search algorithm with respect to suffix array using GPU, even suffix tree, is efficient method to high performance bioinformatics applications.

VI. CONCLUSION

This paper proposed a comparative evaluation of suffix tree and suffix array, which are extra applicable for accelerating DNA sequence matching. These indexed structures were thoroughly compared using two different parallel platforms: multi-core(i7 3770K quad-core) and many-core(NVIDIA GeForce GTX680 GPU).

These observations reveal that suffix array is slightly greater than suffix tree though the asymptotic search time of the suffix array ($O(n \log m)$) is far higher than that of the suffix tree ($O(n)$) in multi-core platform, due to its more efficient use of the cache memory. Nevertheless, because of the more regular execution flow of this algorithm and improved usage of cache, the obtained results show that suffix array clearly outperform suffix tree in many-core platform. Suffix array occupy the space is approximately 20%~30% relative to that of suffix tree.

ACKNOWLEDGMENT

These research subject was supported by Sichuan University Jinjiang College, the department of Computer Science & Engineering. This paper was reviewed and approved by all members of High Performance Bioinformatics Group. Thanks for Prof.Bingfa Lee's suggestions.

REFERENCES

- [1] T. H. Cormen, C. E. Leiserson, R. L. Rivest, and C. Stein, *Introduction to Algorithms, Third Edition*, 3rd ed. The MIT Press, 2009.

- [2] G. Encarnaijao, N. Sebastiao, and N. Roma, "Advantages and gpu implementation of high-performance indexed dna search based on suffix arrays," in *High Performance Computing and Simulation (HPCS), 2011 International Conference on*, july 2011, pp. 49–55.
- [3] M. Farach-Colton, P. Ferragina, and S. Muthukrishnan, "On the sorting-complexity of suffix tree construction," *Journal of The ACM*, vol. 47, pp. 987–1011, 2000.
- [4] B. Gaster, L. Howes, D. Kaeli, P. Mistry, and D. Schaa, *Heterogeneous Computing with OpenCL: OpenCL 1.2 Edition*. Elsevier Science Limited, 2012.
- [5] K. Gregory and A. Miller, *C++ AMP: Accelerated Massive Parallelism with Microsoft® Visual C++®*. Microsoft Press, 2012.
- [6] D. Gusfield, *Algorithms on Strings, Trees, and Sequences - Computer Science and Computational Biology*. Cambridge University Press, 1997.
- [7] W.-m. Hwu, K. Keutzer, and T. G. Mattson, "The concurrency challenge," *IEEE Des. Test*, vol. 25, no. 4, pp. 312–320, Jul. 2008. [Online]. Available: <http://dx.doi.org/10.1109/MDT.2008.110>
- [8] J. Kärkkäinen, P. Sanders, and S. Burkhardt, "Linear work suffix array construction," *Journal of the ACM (JACM)*, vol. 53, no. 6, pp. 918–936, 2006.
- [9] D. Kirk and W. Hwu, *Programming Massively Parallel Processors: A Hands-on Approach*, 2nd ed., ser. Applications of GPU Computing Series. Elsevier Science Morgan Kaufmann, 2012.
- [10] S. Kurtz, A. Phillippy, A. Delcher, M. Smoot, M. Shumway, C. Antonescu, and S. Salzberg, "Versatile and open software for comparing large genomes," *Genome Biology*, vol. 5, pp. 1–9, 2004. [Online]. Available: <http://dx.doi.org/10.1186/gb-2004-5-2-r12>
- [11] E. M. McCreight, "A space-economical suffix tree construction algorithm," *J. ACM*, vol. 23, no. 2, pp. 262–272, Apr. 1976. [Online]. Available: <http://doi.acm.org/10.1145/321941.321946>
- [12] *NVIDIA CUDA Compute Unified Device Architecture Programming Guide*, Nvidia, 2007.
- [13] S. J. Puglisi, W. F. Smyth, and A. H. Turpin, "A taxonomy of suffix array construction algorithms," *ACM Comput. Surv.*, vol. 39, no. 2, Jul. 2007. [Online]. Available: <http://doi.acm.org/10.1145/1242471.1242472>
- [14] J. Sanders and E. Kandrot, *CUDA by Example: An Introduction to General-Purpose GPU Programming*. Addison-Wesley, 2011.
- [15] M. Schatz, C. Trapnell, A. Delcher, and A. Varshney, "High-throughput sequence alignment using graphics processing units," *BMC bioinformatics*, vol. 8, no. 1, p. 474, 2007.
- [16] J. Shendure and H. Ji, "Next-generation dna sequencing," *Nature biotechnology*, vol. 26, no. 10, pp. 1135–1145, 2008.
- [17] E. Sintorn and U. Assarsson, "Fast parallel gpu-sorting using a hybrid algorithm," *J. Parallel Distrib. Comput.*, vol. 68, no. 10, pp. 1381–1388, Oct. 2008. [Online]. Available: <http://dx.doi.org/10.1016/j.jpdc.2008.05.012>
- [18] E. Ukkonen, "On-line construction of suffix trees," *Algorithmica*, vol. 14, pp. 249–260, 1995. [Online]. Available: <http://dx.doi.org/10.1007/BF01206331>